


564 Oct-O-Mat™



- This durable rubber product is designed to function at the immediate entrance, primarily as a scraper mat to stop dirt, grit and grime outside the doorway.
- Its superior rubber compounds is made to withstand weather extremes and the heaviest of foot traffic
- Raised knobs underneath allow excellent drainage, leaving a clean and dry surface.
- Outdoor entrances - Heavy foot traffic areas
- Custom sizes available.
- Hose off with water and hang to dry.
- The heavy weight of this mat assures it is non-shifting.

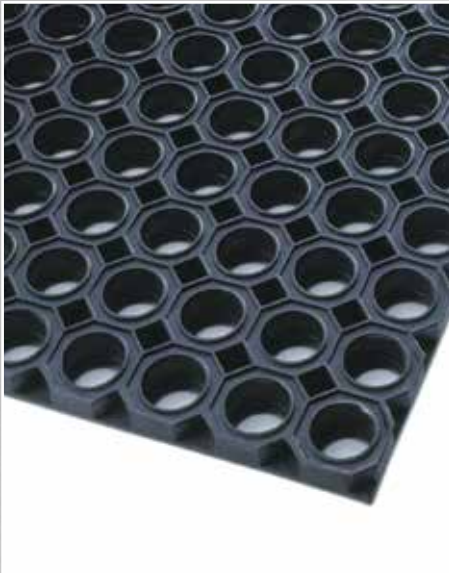

564 Oct-O-Mat™

PRODUCT SPECIFICATIONS			
Designation	Dust Control Matting		
Type	Non-absorbent/ scrape rubber mat		
Description	Octogonal ring design with open construction		
Material	Natural rubber compound		
Process	Compression moulding		
Category	Outdoor Non absorbent - Rubber classics		
Recommended use	Outdoor - heavy foot traffic		
Colours	Black		
Weight	12,7 kg/m²		
Thickness	23 mm		
Standard sizes	60 cm x 80 cm 75 cm x 100 cm 80 cm x 120 cm 100 cm x 150 cm		
Custom sizes	Per m²		
Special remarks	Suitable for use under extreme weather conditions Accessories: Connectors, Insert brushes		
PRODUCT TESTING			
Tests		Norms	Results
Abrasion resistance		ASTM D3884	
Colour fastness to light		AATCC 16E	
Accelerated wear test by sim floor machine		U.S.	
Accelerated soiling		U.S.	
Anti-slip		DIN51130 BGR181	
Water retention		U.S	
Hardness		U.S	60 Shore A
Sanitary epidemiologic test		GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV	Pass - Certificate no. 77.01.16.251.P.044985.07.09
FIRE TESTING			
	Surface Flammability	ASTM D2859	
	Classification of the reaction to fire performance	DIN EN 13501-1	B1 on demand
Sustainability		<ul style="list-style-type: none">• Recyclable material• REACH compliant (Registration, Evaluation, Authorization and restrictions of Chemicals)• Contributes to cleaner environment by reducing need of cleaning chemicals	

zu beziehen bei:
<https://arbeitsplatzmatten-profi.com>
Mail: info@arbeitsplatzmatten-profi.com
Tel.: 06359/9611906