

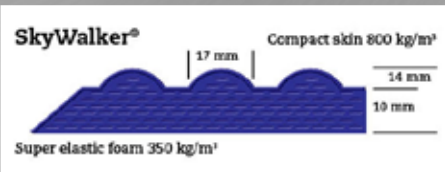


450 Skywalker®

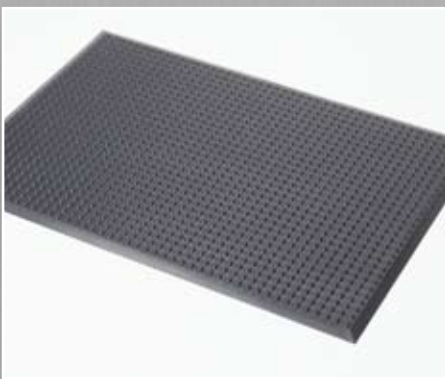

- Ergonomically designed bubble surface provides a sure footing and fatigue relief guarantees optimal ergonomic effects in stationary standing positions.
- Made of high quality ether based polyurethane.
- Excellent thermal insulation performance is owed to a uniform closed cell structure wherein gas remains trapped.
- Provides sensational standing comfort and longevity, maintaining its optimal ergonomic properties for the longest time.
- Integral skin adds to the compression force deflection properties provide resistance to wear and is non-porous.
- Environmental friendly, produced without use of organic carbon-based blowing agents, therefore free of Freon.
- All 4 sides have bevelled edges.
- Clean by sweeping or vacuuming.
- Free of toxic DOP and DMF.

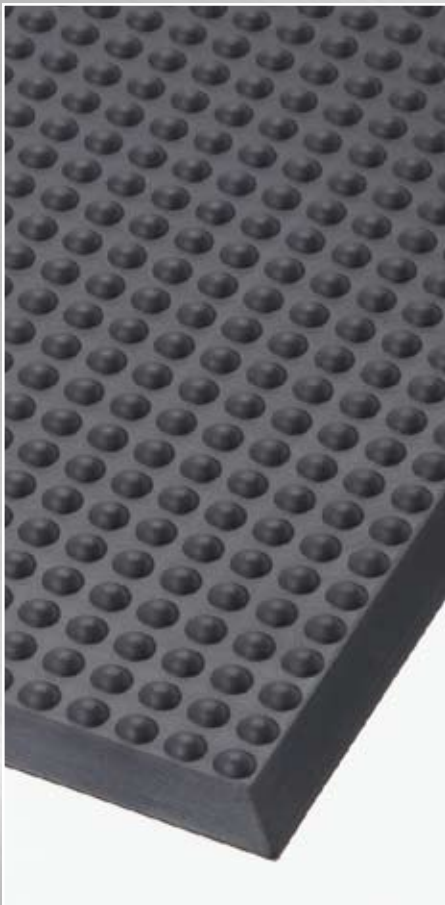

450 Skywalker®

PRODUCT SPECIFICATIONS			
Designation	Industrial matting		
Type	Anti-fatigue		
Description	Uniform closed cell structure wherein gas remains trapped, bubble surface		
Material	Polyurethane (ether based)		
Process	Injection moulding		
Category	Best		
Recommended use	Medium duty - dry area		
Colours	Grey		
Weight	4.8 kg/m²		
Thickness	14 mm		
Standard sizes	65 cm x 95 cm 65 cm x 135cm 65 cm x 185 cm 95 cm x 125 cm 95 cm x 160 cm 95 cm x 185 cm		
Custom sizes	Skywalker® Custom available		
Special remarks	ESD or B1 version are available on demand		
PRODUCT TESTING			
Tests	Norms	Results	
Compression set	DIN 53572	3.9%	
Density	DIN 53420	350 kg/m³	
Abrasion resistance (2.5N)	DIN 53516	150 mg	
Static coefficient of friction	ASTM C1028-96		
Elongation at break	DIN 53455-6-4	300%	
Tensile strength	DIN 53455-6-4	1 N/mm	
Graves tear strength	DIN 53507-A	1.7 N/mm	
Shore hardness	ASTM 53505	25 Shore A	
Strain hardness (40%)	DIN 53577	0.25 N/mm²	
Anti-slip	DIN 51130 and BG-RULE BGR181	R11	
FIRE TESTING			
	Resistance to temperature	-40° C until + 80° C	
	Fire retardancy		
		EN 13501-1	
	Flammability test	DIN 4102	B2 - Normal flammability
ESD		ANSI ESD S7.1 50% Humidity	
Sustainability		<ul style="list-style-type: none">Recyclable materialReach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals)	

zu beziehen bei:
<https://arbeitsplatzmatten-profi.com>
Mail: info@arbeitsplatzmatten-profi.com
Tel.: 06359/9611906